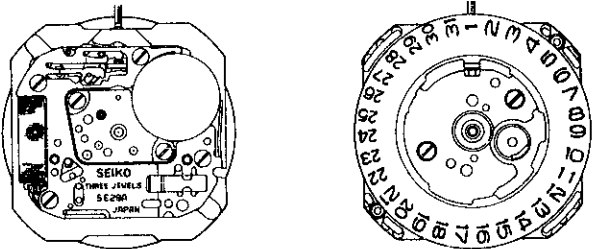


PARTS CATALOGUE/TECHNICAL GUIDE

Cal. 5E29A

[SPECIFICATIONS]

| Item | | Cal. No. | 5E29A |
|---------------------------------|------------------|---|---|
| Movement | | |  <p style="text-align: right;">(x 1.5)</p> |
| Movement size | Outside diameter | φ23.0 mm 19.0 mm between 3 o'clock and 9 o'clock sides 19.0 mm between 6 o'clock and 12 o'clock sides | |
| | Casing diameter | φ19.5 mm 15.0 mm between 3 o'clock and 9 o'clock sides 19.0 mm between 6 o'clock and 12 o'clock sides | |
| | Height | 1.9 mm | |
| Time indication | | 2 hands (Hand motion: 1-second step) | |
| Driving system | | Step motor (Load compensated driving pulse type) | |
| Additional mechanism | | <ul style="list-style-type: none"> • Electronic circuit reset switch • Train wheel setting device | |
| Loss/gain | | Monthly rate at normal temperature range: less than 15 seconds | |
| Regulation system | | Nil | |
| Measuring gate by quartz tester | | Use 10-second gate. | |
| Battery | | SEIKO SR716SW, Matsushita SR716SW Battery life is approximately 3 years. Voltage: 1.55V | |
| Jewels | | 3 jewels | |

HATTORI SEIKO CO., LTD.

PARTS CATALOGUE

Cal. 5E29A


Disassembling procedures Figs.: ① → ③③
 Reassembling procedures Figs.: ③③ → ①

Lubricating: Types of oil

● Moebius A
 ○ SEIKO Watch Oil S-6

Oil quantity

○ Normal quantity
 ◡ Extremely small

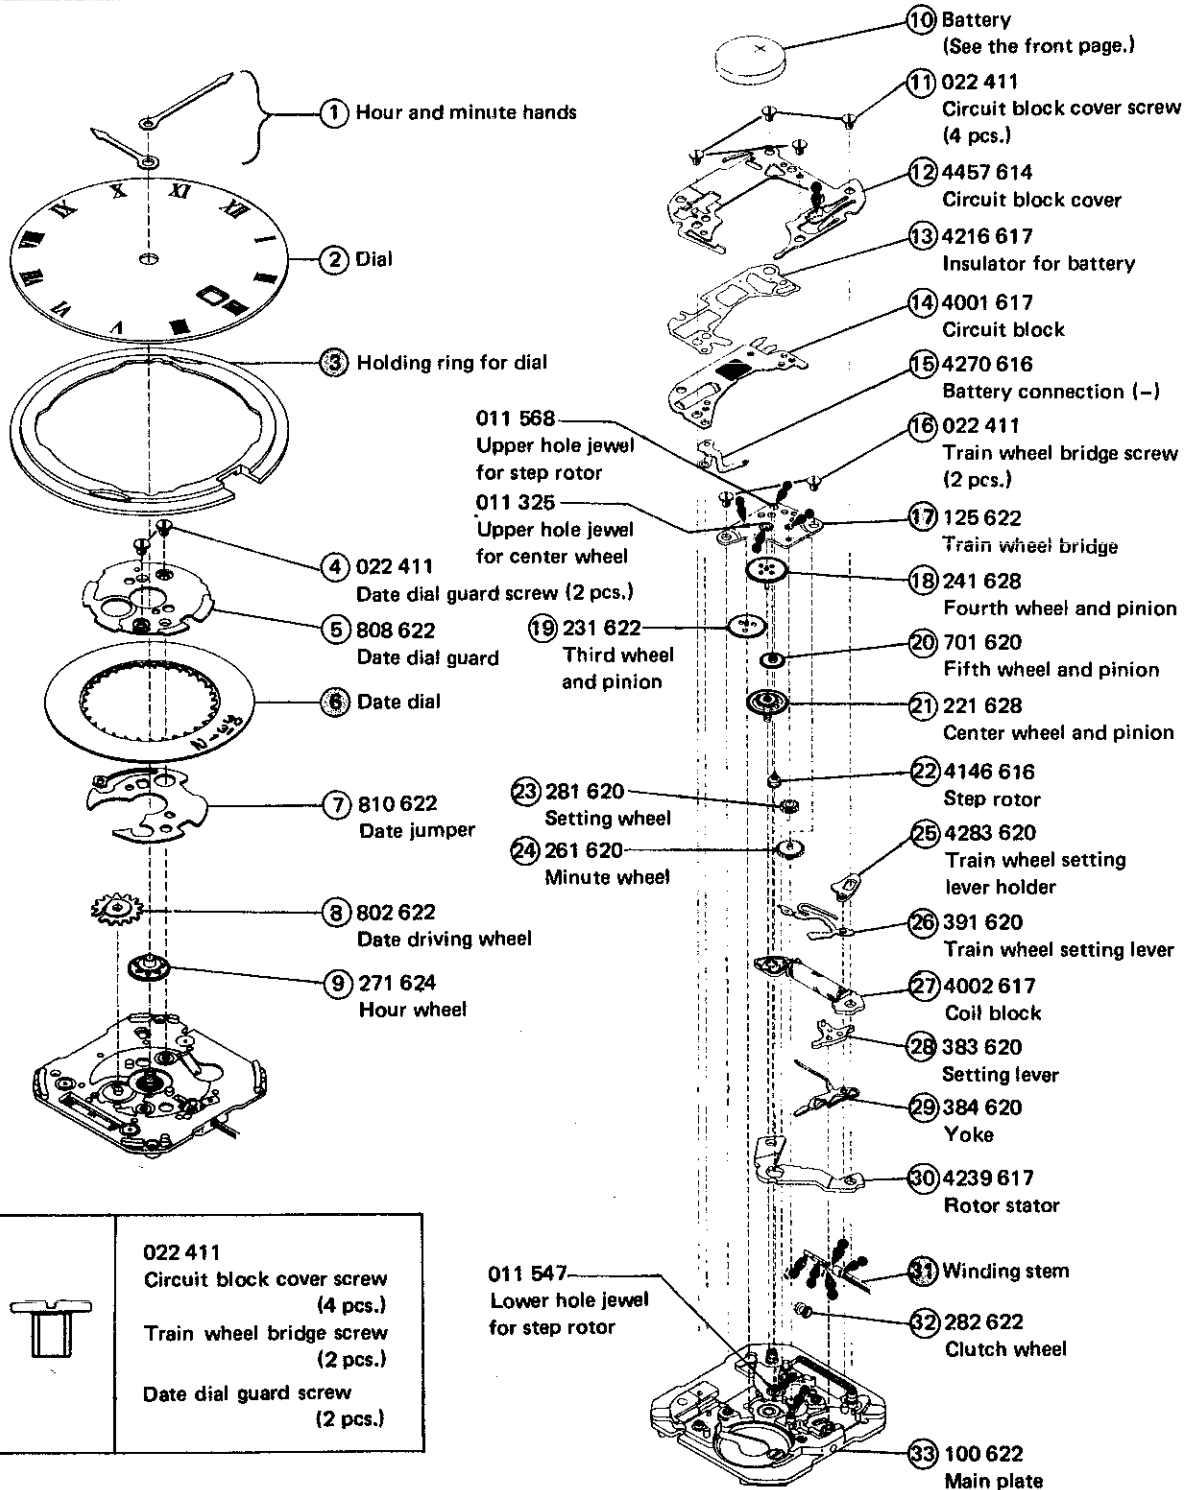

| | |
|--|--|
| | 022 411 Circuit block cover screw (4 pcs.) |
| | Train wheel bridge screw (2 pcs.) |
| | Date dial guard screw (2 pcs.) |

⊙ ⇨ Please see the remarks on the following pages.

PARTS CATALOGUE

Cal. 5E29A

Remarks:

- ③ Holding ring for dial
- ③① Winding stem 351 625

The types of holding ring for dial and winding stem are determined based on the design of cases. Check the case number and refer to "SEIKO Casing Parts Catalogue" to choose their corresponding types.

- ⑥ Date dial 801 959

| Part No. | Crown position | Calendar frame position | Figure color | Ground color |
|----------|----------------|-------------------------|--------------|--------------|
| 801 959 | 3 o'clock | 3 o'clock | Black | White |
| 801 958 | 3 o'clock | 6 o'clock | Black | Gold |
| 801 957 | 3 o'clock | 6 o'clock | Black | White |
| 878 511 | 3 o'clock | 3 o'clock | Red | Gold |

The types of date dial is determined based on the design of cases. When ordering the date dial, please specify (1) Cal. No., (2) the crown position, (3) the calendar frame position, and (4) Dial No.

TECHNICAL GUIDE

Cal. 5E29A

- The explanation here is only for the particular points of Cal. 5E29A. For other information, refer to "PARTS CATALOGUE/TECHNICAL GUIDE for Cal. 5E20A".
- For the repairing, checking and measuring procedures, refer to the "TECHNICAL GUIDE, GENERAL INSTRUCTIONS".

①⑦ Train wheel bridge

- Setting position

